

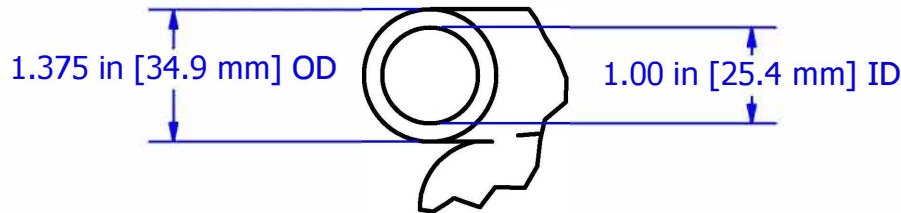
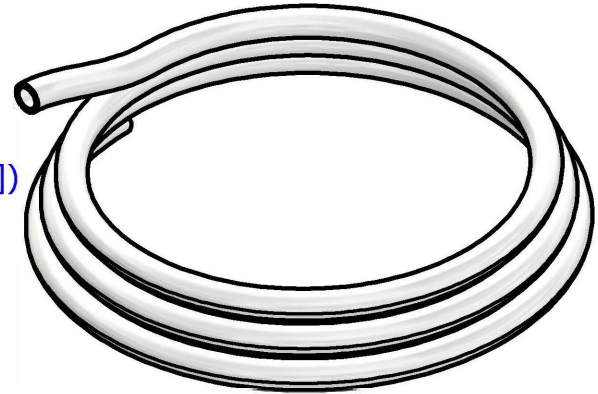


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

| REVISIONS | | | | |
|-----------|-----|---------------|------------|------------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |
| | - | Sales Drawing | 10/12/2022 | CD Morland |

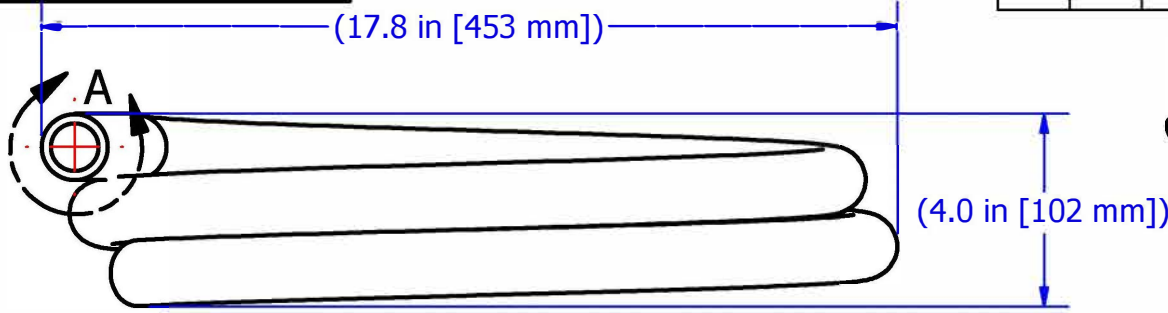

DETAIL A
SCALE 1 / 2

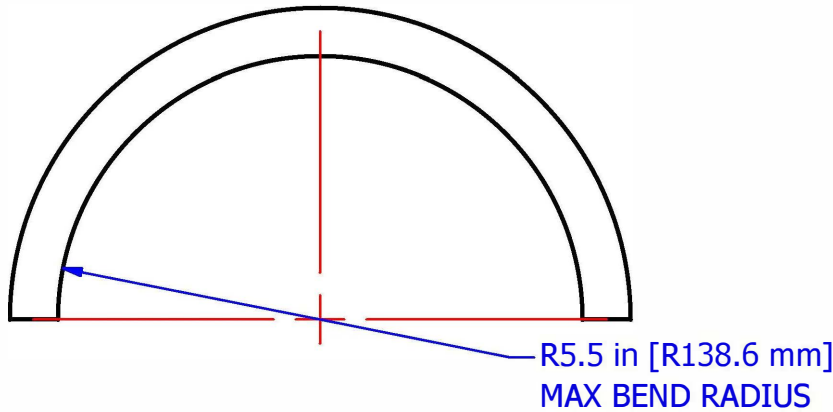

| TUBING INFORMATION | | |
|---------------------|--------------------------------|-----------|
| PROPERTY | SPECIFICATION | UNIT |
| DUROMETER (SHORE A) | 60 | POINTS |
| TENSILE STRENGTH | 1190 | PSI |
| ELONGATION | 915 | % |
| BURST PRESSURE | 15 (1.0) | PSI (BAR) |
| TEMPERATURE RANGE | 275 (135) MAX -85 (-67) MIN | °F (°C) |

NOTES:

- 1.0 MATERIAL: THERMOPLASTIC ELASTOMER (TPE)
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, AND AUTOCLAVE.
- 4.0 C-FLEX TUBING WILL DETERIORATE WITH REPEATED AUTOCLAVING
- 5.0 RADIATION IS THE RECOMMENDED METHOD OF STERILIZATION FOR ALL C-FLEX THERMOPLASTIC MATERIALS.
- 6.0 STANDARD COIL IS 15 FT

| | | |
|--|--|--|
| DRAWN EA Flores 10/12/2022 CHECKED YA Zanki 10/12/2022 APPROVED CD Morland 10/12/2022 | International Filter Products 7914 AJAY RD. PHONE: 818-504-8115 SUN VALLEY, CA 91352 FAX: 818-841-2947 email: cflaie@internationalfilterproducts.com | TITLE TUBE, 1.00" x 1.375", TPE |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS FRACTIONS +/- 1/16 X +/- .030 ANGLES +/- 1/2 XX +/- .015 SURFACE ROUGHNESS 125 XXX +/- .005 CONCENTRICITIES .010 (FIM) INTERNAL RADII .015~.030 BREAK CORNERS .005~.015 | SIZE A | ISOF NO 374-1000-6 DWG NO REV - |
| SCALE NA | WEIGHT 4.800 lbmass (approx.) | SHEET 1 OF 1 |