
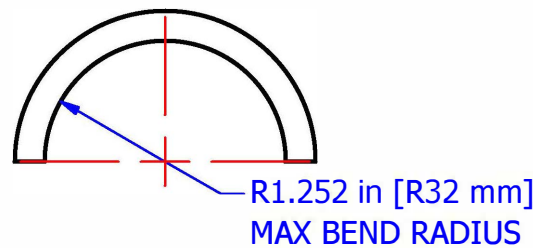
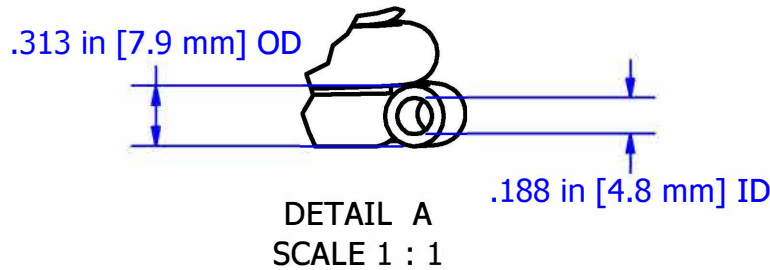
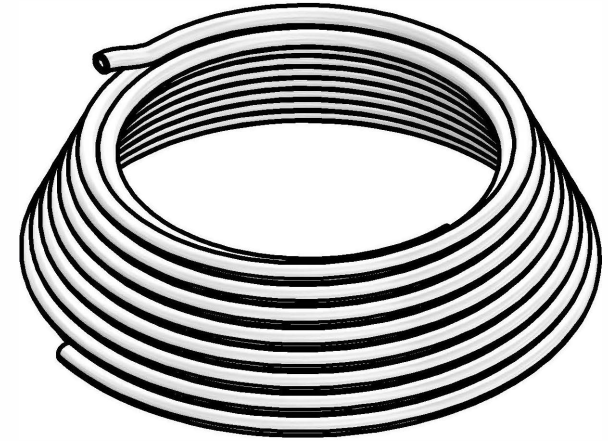


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	8/12/2022	CD Morland

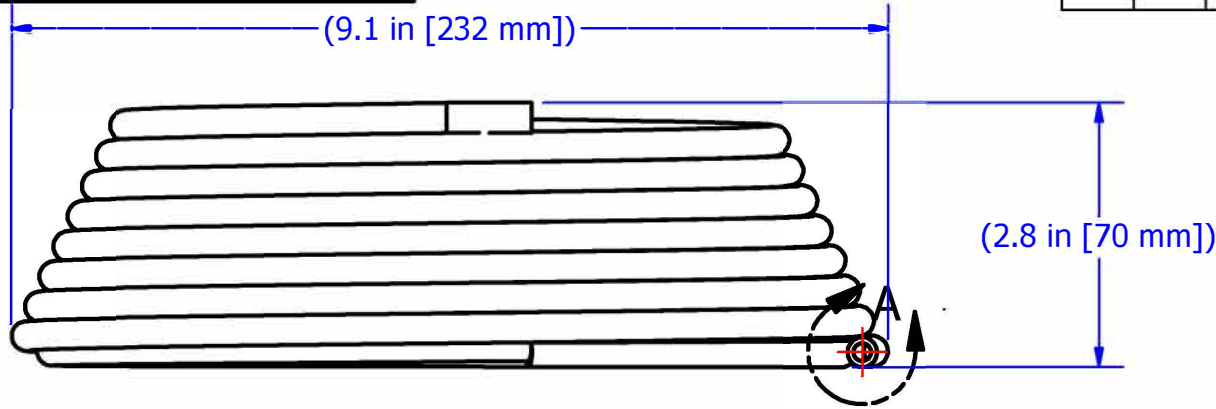

TUBING INFORMATION		
PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	60	POINTS
TENSILE STRENGTH	1190	PSI
ELONGATION	915	%
BURST PRESSURE	22 (1.5)	PSI (BAR)
TEMPERATURE RANGE	275 (135) MAX -85 (-67) MIN	°F (°C)

NOTES:

- 1.0 MATERIAL: THERMOPLASTIC ELASTOMER (TPE)
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, AND AUTOCLAVE.
- 4.0 C-FLEX TUBING WILL DETERIORATE WITH REPEATED AUTOCLAVING
- 5.0 RADIATION IS THE RECOMMENDED METHOD OF STERILIZATION FOR ALL C-FLEX THERMOPLASTIC MATERIALS.
- 6.0 STANDARD COIL IS 50 FT

DRAWN EA Flores 8/12/2022 CHECKED YA Zanki 8/12/2022 APPROVED CD Morland 8/12/2022	International Filter Products 7914 AJAY DR. PHONE: 818-504-8115 SUN VALLEY, CA 91352 FAX: 818-841-2947 email: cflaie@internationalfilterproducts.com	TITLE Tube, 0.188" X 0.313", TPE
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS FRACTIONS +/- 1/16 X +/- .030 ANGLES +/- 1/2 XX +/- .015 SURFACE ROUGHNESS 125 XXX +/- .005 CONCENTRICITIES .010 (FIM) INTERNAL RADII .015~.030 BREAK CORNERS .005~.015	SIZE A	ISOF NO 374-188-2
SCALE NA	WEIGHT 2.200 lb/mass (approx.)	SHEET 1 OF 1