

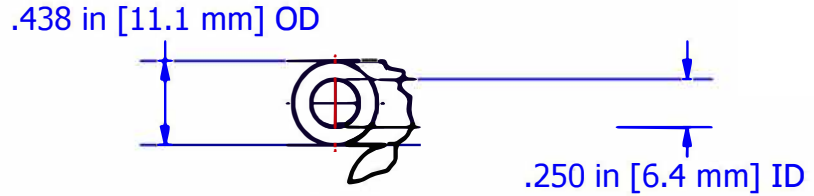
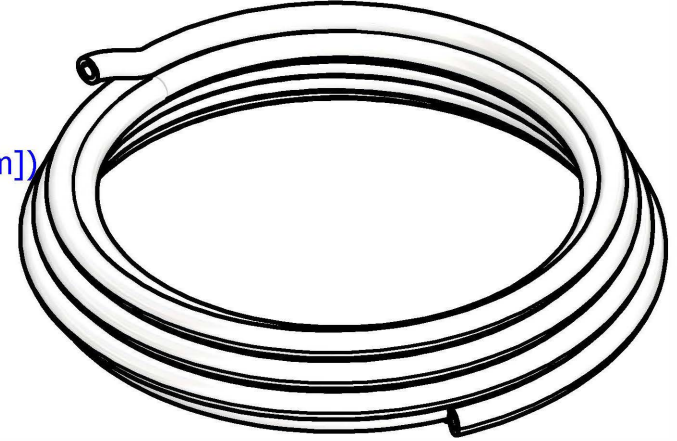


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	10/12/2022	CD Morland

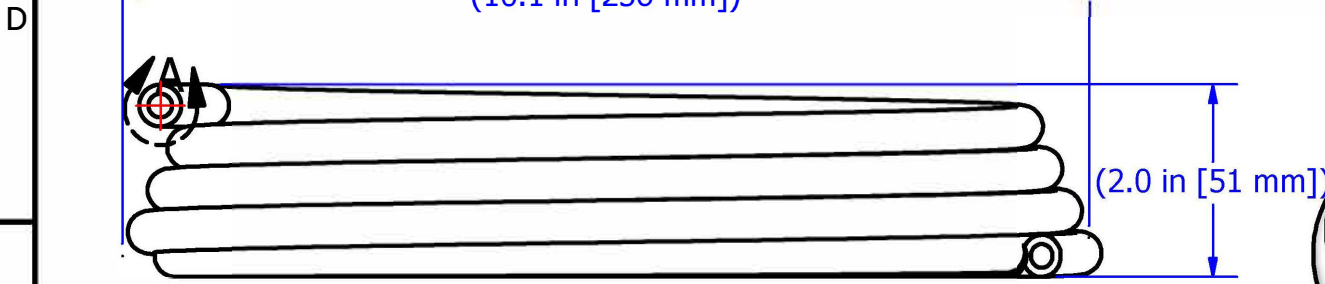

DETAIL A
SCALE 1 : 1

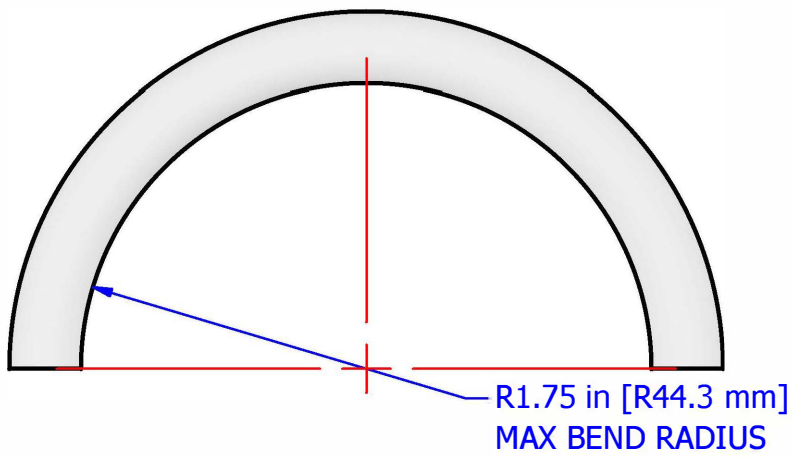

TUBING INFORMATION		
PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	60	POINTS
TENSILE STRENGTH	1190	PSI
ELONGATION	915	%
BURST PRESSURE	21 (1.5)	PSI (BAR)
TEMPERATURE RANGE	275 (135) MAX -85 (-67) MIN	°F (°C)

NOTES:

- 1.0 MATERIAL: THERMOPLASTIC ELASTOMER (TPE)
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, AND AUTOCLAVE.
- 4.0 C-FLEX TUBING WILL DETERIORATE WITH REPEATED AUTOCLAVING
- 5.0 RADIATION IS THE RECOMMENDED METHOD OF STERILIZATION FOR ALL C-FLEX THERMOPLASTIC MATERIALS.
- 6.0 STANDARD COIL IS 50 FT

DRAWN EA Flores 10/12/2022 CHECKED YA Zanki 10/12/2022 APPROVED CD Morland 10/12/2022	International Filter Products 794d AJAY DR. SUN VALLEY, CA 91352 PHONE: 818-504-8115 FAX: 818-841-2947 email: cfi@ieinternationalfilterproducts.com
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS FRACTIONS +/- 1/16 X +/- .030 ANGLES +/- 1/2 XX +/- .015 SURFACE ROUGHNESS 125 XXX +/- .005 CONCENTRICITIES .010 (FIM) INTERNAL RADII .015~.030 BREAK CORNERS .005~.015	TITLE Tube. 0.250" X 0.438". TPE SIZE A ISOF NO DWG NO 374-250-3 SCALE NA WEIGHT 1.400 lbmass (approx.) SHEET 1 OF 1