
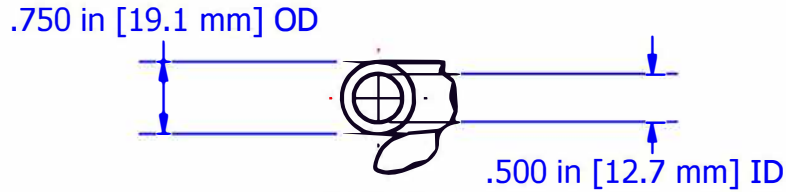
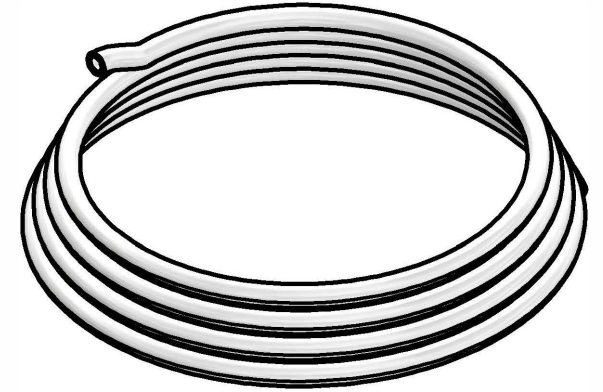



THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	10/12/2022	CD Morland

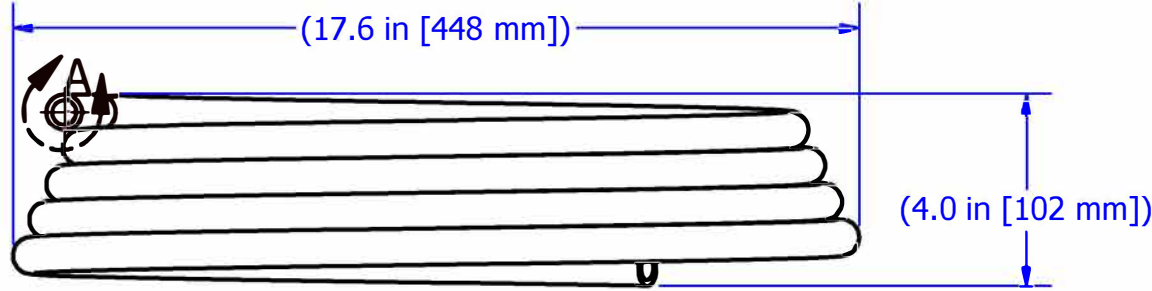

DETAIL A
SCALE 1 / 2

TUBING INFORMATION		
PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	60	POINTS
TENSILE STRENGTH	1190	PSI
ELONGATION	915	%
BURST PRESSURE	16 (1.1)	PSI (BAR)
TEMPERATURE RANGE	275 (135) MAX -85 (-67) MIN	°F (°C)

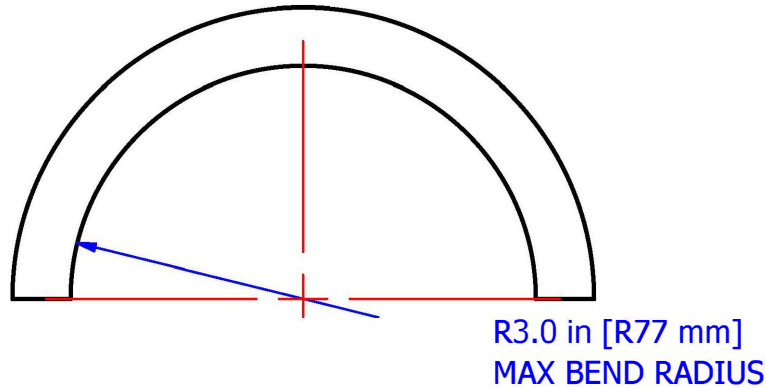

NOTES:

- 1.0 MATERIAL: THERMOPLASTIC ELASTOMER (TPE)
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, AND AUTOCLAVE.
- 4.0 C-FLEX TUBING WILL DETERIORATE WITH REPEATED AUTOCLAVING
- 5.0 RADIATION IS THE RECOMMENDED METHOD OF STERILIZATION FOR ALL C-FLEX THERMOPLASTIC MATERIALS.
- 6.0 STANDARD COIL IS 50 FT

DRAWN EA Flores	10/12/2022	International Filter Products	
CHECKED YA Zanki	10/12/2022	7914 AJAY DR. SUN VALLEY, CA 91352	PHONE: 818-504-8115 FAX: 818-841-2947 email: charlie@internationalfilterproducts.com
APPROVED CD Morland	10/12/2022	TITLE	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		TUBE, 0.500" x 0.750", TPE	
DECIMALS X +/- .030	FRACTIONS +/- 1/16	SIZE A	ISOF NO
XX +/- .015	ANGLES +/- 1/2	SCALE	DWG NO 374-500-4
XXX +/- .005	SURFACE ROUGHNESS 125	WEIGHT 3.200 lbmass (approx.)	REV -
CONCENTRICITIES .010 (FIM) INTERNAL RADII .015~.030 BREAK CORNERS .005~.015		SHEET 1 OF 1	