

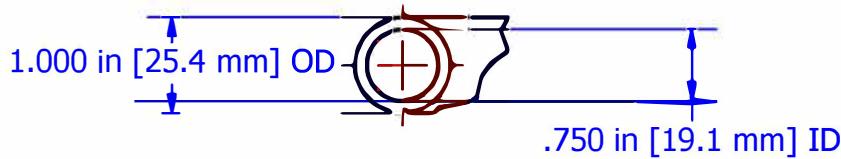
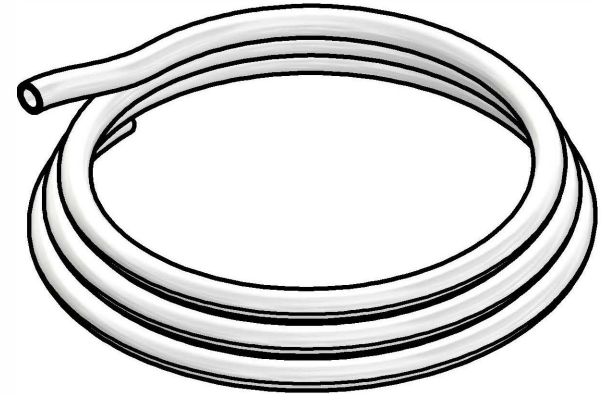


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	10/12/2022	CD Morland

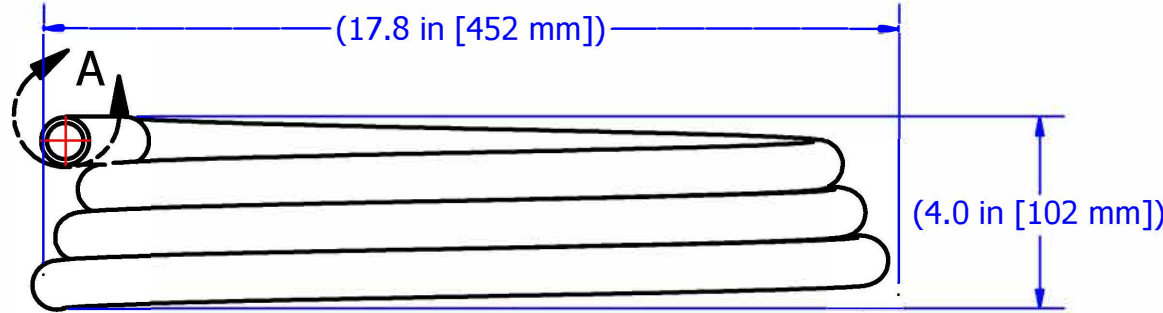

DETAIL A  
SCALE 1 / 2

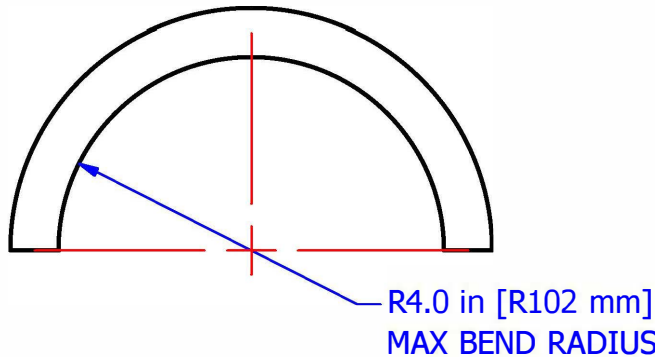

TUBING INFORMATION		
PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	60	POINTS
TENSILE STRENGTH	1190	PSI
ELONGATION	915	%
BURST PRESSURE	11 (0.8)	PSI (BAR)
TEMPERATURE RANGE	275 (135) MAX -85 (-67) MIN	°F (°C)

NOTES:

- 1.0 MATERIAL: THERMOPLASTIC ELASTOMER (TPE)
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, AND AUTOCLAVE.
- 4.0 C-FLEX TUBING WILL DETERIORATE WITH REPEATED AUTOCLAVING
- 5.0 RADIATION IS THE RECOMMENDED METHOD OF STERILIZATION FOR ALL C-FLEX THERMOPLASTIC MATERIALS.
- 6.0 STANDARD COIL IS 15 FT

DRAWN EA Flores	10/12/2022	<b>International Filter Products</b>	
CHECKED YA Zanki	10/12/2022	7914 AJAY DR. SUN VALLEY, CA 91352	PHONE: 818-504-8115 FAX: 818-841-2947 email: cfl@internationalfilterproducts.com
APPROVED CD Morland	10/12/2022	TITLE <b>TUBE, 0.750" x 1.00", TPE</b>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		SIZE <b>A</b>	ISOF NO
DECIMALS	FRACTIONS +/- 1/16	DWG NO <b>374-750-4</b>	REV -
X +/- .030	ANGLES +/- 1/2	SCALE NA	
XX +/- .015	SURFACE ROUGHNESS 125	WEIGHT 4.600 lbmass (approx.)	SHEET <b>1</b> OF <b>1</b>
XXX +/- .005	CONCENTRICITIES .010 (FIM)		
	INTERNAL RADII .015~.030		
	BREAK CORNERS .005~.015		