

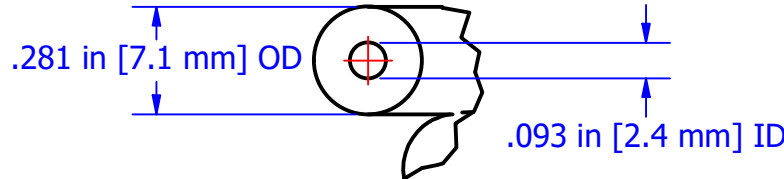
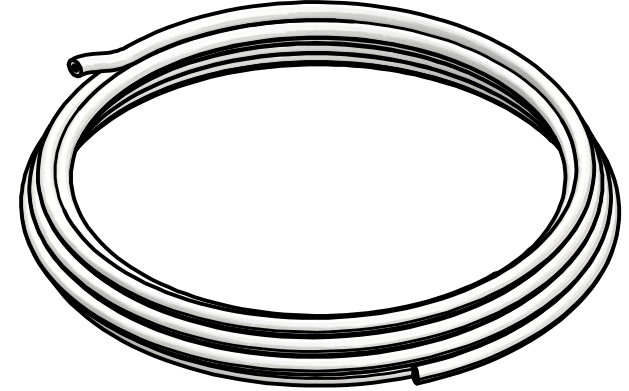


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	8/11/2022	CD Morland

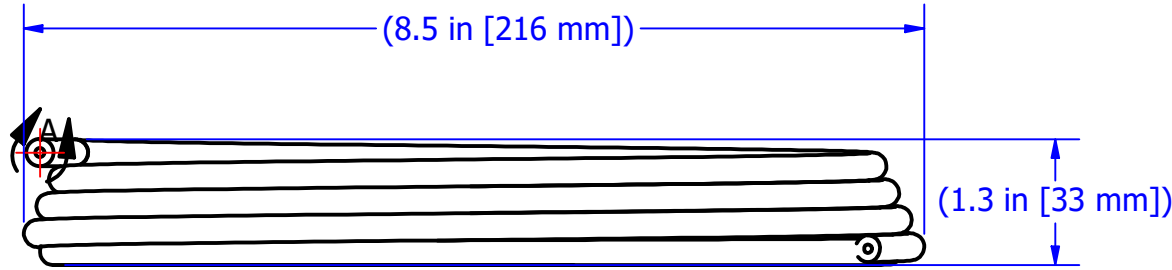

DETAIL A
SCALE 2 : 1

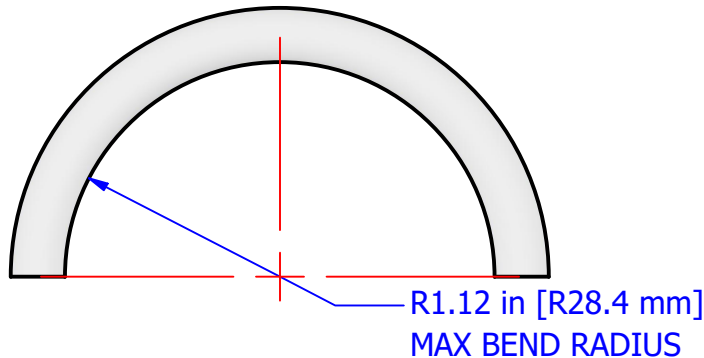

TUBING INFORMATION		
PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	50-56	POINTS
TENSILE STRENGTH	1000 MIN	PSI
ELONGATION	700 MIN	%
TEAR B	200 MIN	PPI
BURST PRESSURE	82.5 (5.69)	PSI (BAR)
OPERATING TEMPERATURE	500 (260) MAX	°F (°C)

NOTES:

- 1.0 MATERIAL: PLATINUM CURED SILICONE
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, ETO, AND AUTOCLAVE.
- 4.0 STANDARD COIL IS 25 FT

DRAWN EA Flores	8/11/2022	International Filter Products			
CHECKED YA Zanki	8/11/2022	11070 FLEETWOOD ST. UNIT B SUN VALLEY, CA 91352		PHONE: 818-504-8115 FAX: 818-841-2947	email: charlie@internationalfilterproducts.com
APPROVED CD Morland	8/11/2022	TITLE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		Tube, 0.093" X 0.281", Silicone			
DECIMALS X +/- .030 XX +/- .015 XXX +/- .005	FRACTIONS +/- 1/16 ANGLES +/- 1/2 SURFACE ROUGHNESS 125	SIZE A	ISOF NO	DWG NO STHT C-093-3	REV -
CONCENTRICITIES .010 (FIM) INTERNAL RADII .015~.030 BREAK CORNERS .005~.015		SCALE	WEIGHT 0.800 lbmass (approx.)	SHEET 1 OF 1	