

4

3




2

1


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	8/11/2022	CD Morland

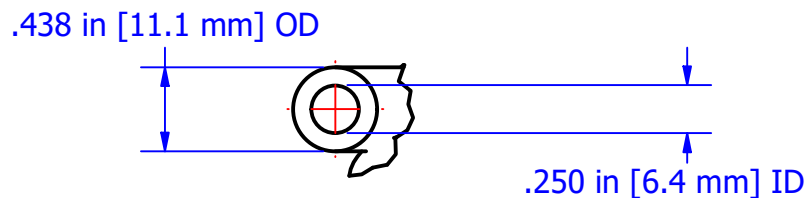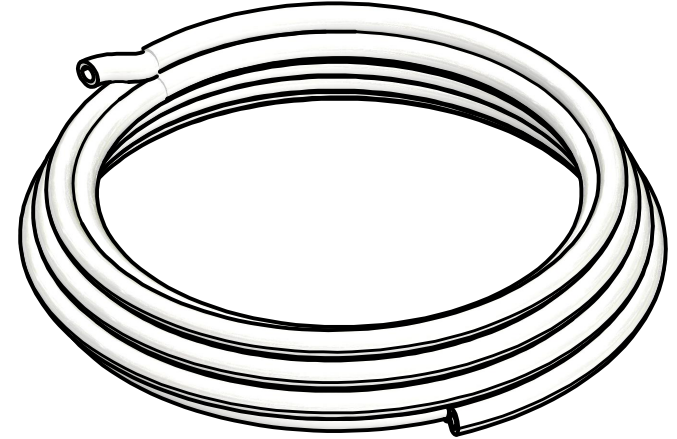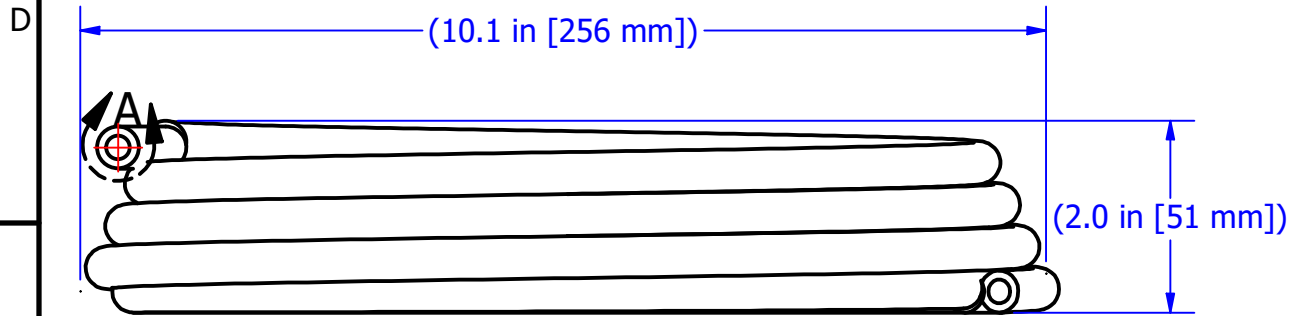

DETAIL A
SCALE 1 : 1

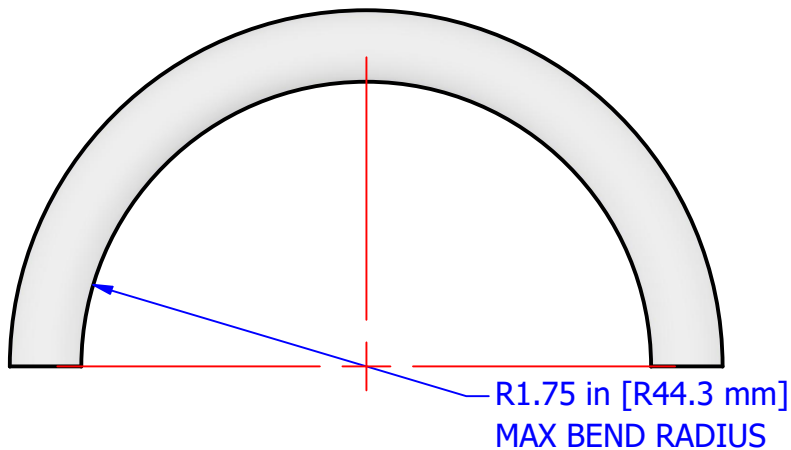

TUBING INFORMATION

PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	50-56	POINTS
TENSILE STRENGTH	1000 MIN	PSI
ELONGATION	700 MIN	%
TEAR B	200 MIN	PPI
BURST PRESSURE	44.7 (3.08)	PSI (BAR)
OPERATING TEMPERATURE	500 (260) MAX	°F (°C)

NOTES:

- 1.0 MATERIAL: PLATINUM CURED SILICONE
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, ETO, AND AUTOCLAVE.
- 4.0 STANDARD COIL IS 25 FT

DRAWN EA Flores	8/11/2022	International Filter Products 11070 FLEETWOOD ST. UNIT B SUN VALLEY, CA 91352 PHONE: 818-504-8115 FAX: 818-841-2947 email: charlie@internationalfilterproducts.com			
CHECKED YA Zanki	8/11/2022	TITLE Tube, 0.250" X 0.438", Silicone			
APPROVED CD Morland	8/11/2022				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		SIZE A			
DECIMALS X +/- .030 XX +/- .015 XXX +/- .005					
FRACTIONS +/- 1/16 ANGLES +/- 1/2 SURFACE ROUGHNESS 125		ISOF NO DWG NO STHT-C-250-3			
CONCENTRICITIES .010 (FIM) INTERNAL RADII .015~.030 BREAK CORNERS .005~.015					
SCALE NA		WEIGHT 1.400 lbmass (approx.)		SHEET 1 OF 1	
				REV -	