

4

3

2

1


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS


ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	8/11/2022	CD Morland

D


D

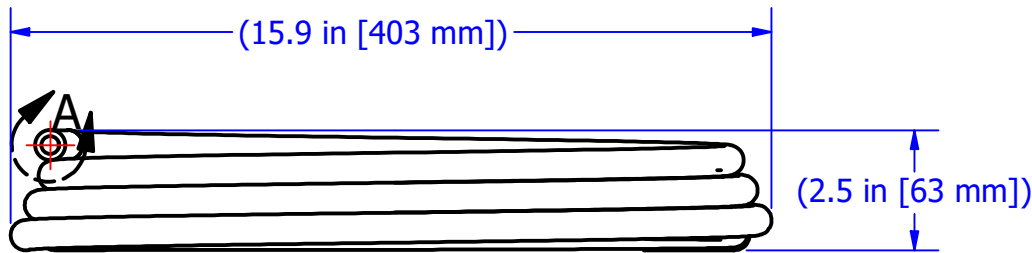

.625 in [15.9 mm] OD

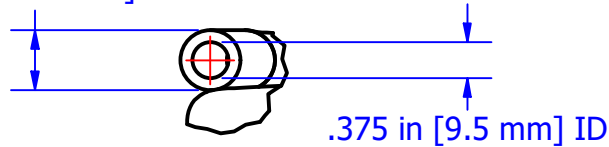


DETAIL A
SCALE 0.50 : 1

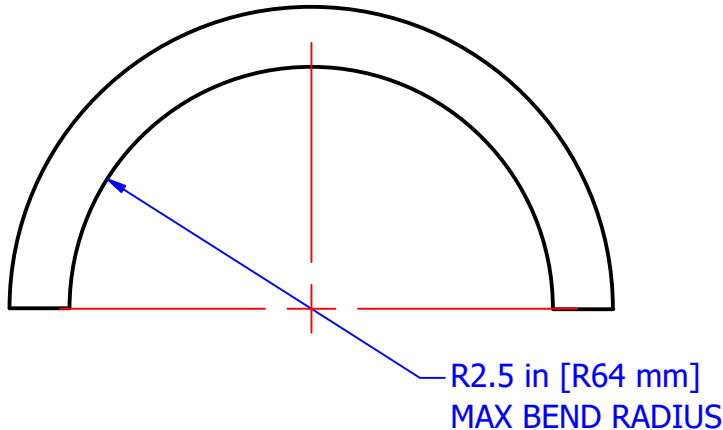

NOTES:

- 1.0 MATERIAL: PLATINUM CURED SILICONE
 2.0 CLEAN ROOM DOUBLE BAGGED.
 3.0 STERILIZABLE BY GAMMA IRRADIATION, ETO, AND AUTOCLAVE.
 4.0 STANDARD COIL IS 25 FT

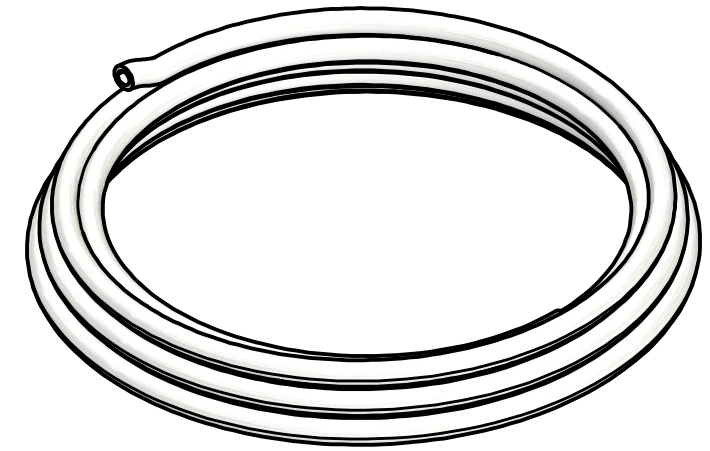

TUBING INFORMATION

PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	50-56	POINTS
TENSILE STRENGTH	1000 MIN	PSI
ELONGATION	700 MIN	%
TEAR B	200 MIN	PPI
BURST PRESSURE	40.4 (2.79)	PSI (BAR)
OPERATING TEMPERATURE	500 (260) MAX	°F (°C)

DRAWN EA Flores	8/11/2022
CHECKED YA Zanki	8/11/2022
APPROVED CD Morland	8/11/2022

International Filter Products

7914 AJAY DRIVE
SUN VALLEY, CA 91352

PHONE: 818-504-8115
FAX: 818-841-2947
email: charlie@internationalfilterproducts.com

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

DECIMALS X +/- .030 XX +/- .015 XXX +/- .005	FRACTIONS +/- 1/16 ANGLES +/- 1/2 SURFACE ROUGHNESS 125
CONCENTRICITIES .010 (FIM) INTERNAL RADII .015~.030 BREAK CORNERS .005~.015	

TITLE Tube, 0.375" X 0.625", Silicone			
SIZE A	ISOF NO	DWG NO STHT-C-375-4	REV -
SCALE NA	WEIGHT 2.600 lbmass (approx.)	SHEET 1 OF 1	

4

3

2

1