

4

3

2

1



THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	8/11/2022	CD Morland


D

D

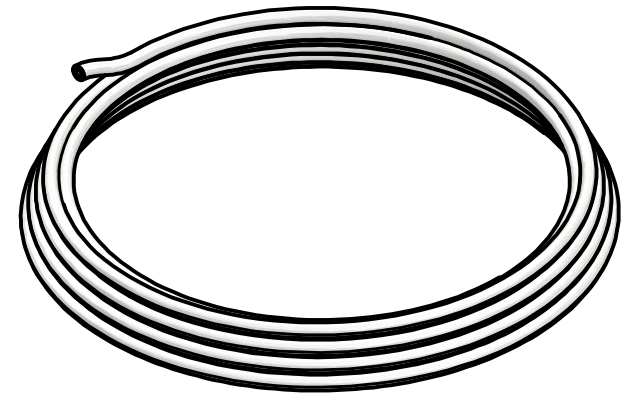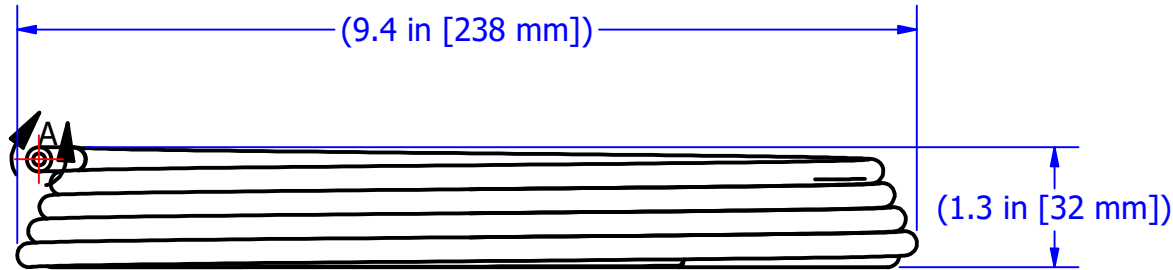

C


C

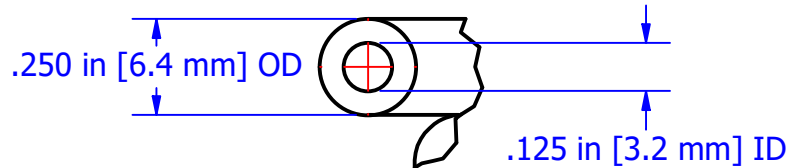

DETAIL A
SCALE 2 : 1

B

B

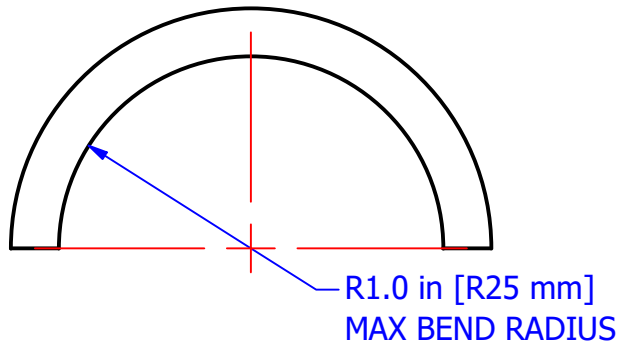

TUBING INFORMATION

PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	48 - 54	POINTS
TENSILE STRENGTH	1100 MIN	PSI
ELONGATION	550 MIN	%
TEAR B	150 MIN	PPI
BURST PRESSURE	50.9 (3.51)	PSI (BAR)
OPERATING TEMPERATURE	500 (260) MAX	°F (°C)

NOTES:

- 1.0 MATERIAL: PLATINUM CURED SILICONE
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, ETO, AND AUTOCLAVE.
- 4.0 STANDARD COIL IS 25 FT

A

A

DRAWN EA Flores	8/11/2022	International Filter Products			
CHECKED YA Zanki	8/11/2022	7914 AJAY DR. SUN VALLEY, CA 91352		PHONE: 818-504-8115 FAX: 818-841-2947 email: charlie@internationalfilterproducts.com	
APPROVED CD Morland	8/11/2022	TITLE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		Tube, 0.125" X 0.250", Silicone			
DECIMALS X +/- .030 XX +/- .015 XXX +/- .005	FRACTIONS +/- 1/16 ANGLES +/- 1/2 SURFACE ROUGHNESS 125				
CONCENTRICITIES .010 (FIM) INTERNAL RADII .015~.030 BREAK CORNERS .005~.015					
SIZE		ISOF NO		DWG NO	
SCALE		NA		ULTRA-C-125-2	
		WEIGHT 0.549 lb/mass (approx.)		REV	
		SHEET		1 OF 1	

4

3

2

1