

4

3



2

1


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	7/3/2024	CD Morland

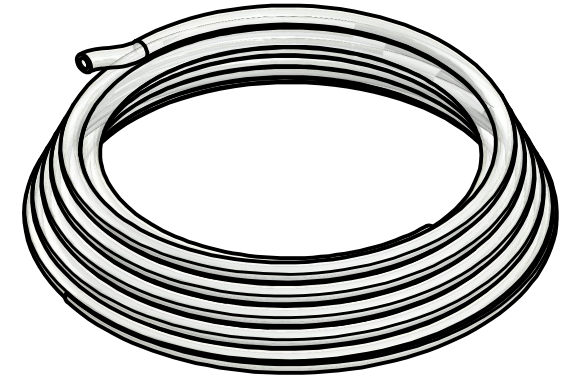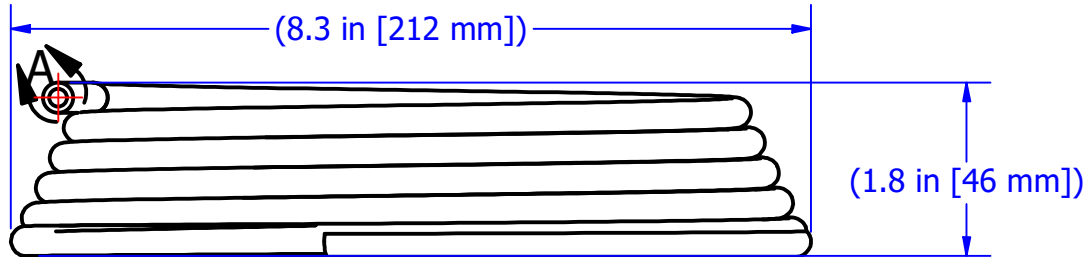


Ø.313 in [Ø7.9 mm] OD



DETAIL A
SCALE 2 : 1

Ø.187 in [Ø4.7 mm] ID



R1.3 in [R32 mm]
MAX BEND RADIUS

TUBING INFORMATION

PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	48 - 54	POINTS
TENSILE STRENGTH	1100 MIN	PSI
ELONGATION	550 MIN	%
TEAR B	150 MIN	PPI
BURST PRESSURE	39.3 (2.71)	PSI (BAR)
OPERATING TEMPERATURE	500 (260) MAX	°F (°C)

NOTES:

- 1.0 MATERIAL: PLATINUM CURED SILICONE
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, ETO, AND AUTOCLAVE.
- 4.0 STANDARD COIL IS 25 FT

DRAWN EA Flores	7/3/2024
CHECKED YA Zanki	7/3/2024
APPROVED CD Morland	7/3/2024

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

DECIMALS	FRACTIONS +/- 1/16
X +/- .030	ANGLES +/- 1/2
XX +/- .015	SURFACE ROUGHNESS 125
XXX +/- .005	

CONCENTRICITIES .010 (FIM)
INTERNAL RADII .015~.030
BREAK CORNERS .005~.015

International Filter Products

7914 AJAY DRIVE
SUN VALLEY, CA 91352

PHONE: 818-504-8115
FAX: 818-841-2947
email: charlie@internationalfilterproducts.com

TITLE

Tube, 0.187" X 0.313", Silicone

SIZE	ISOF NO	DWG NO	REV
A		ULTRA-C-187-2	-
SCALE	NA	WEIGHT 0.750 lbmass (approx.)	SHEET 1 OF 1