

4

3



2

1


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	8/12/2022	CD Morland

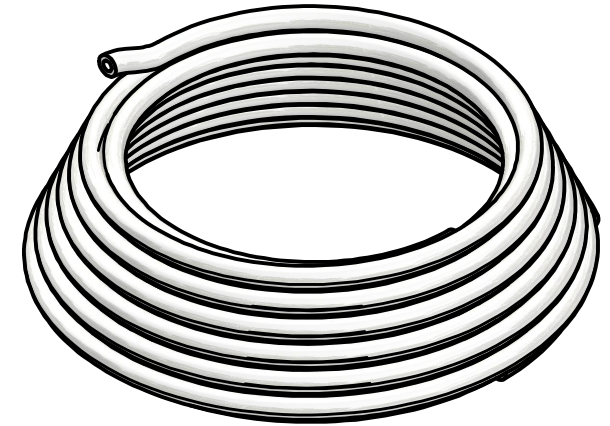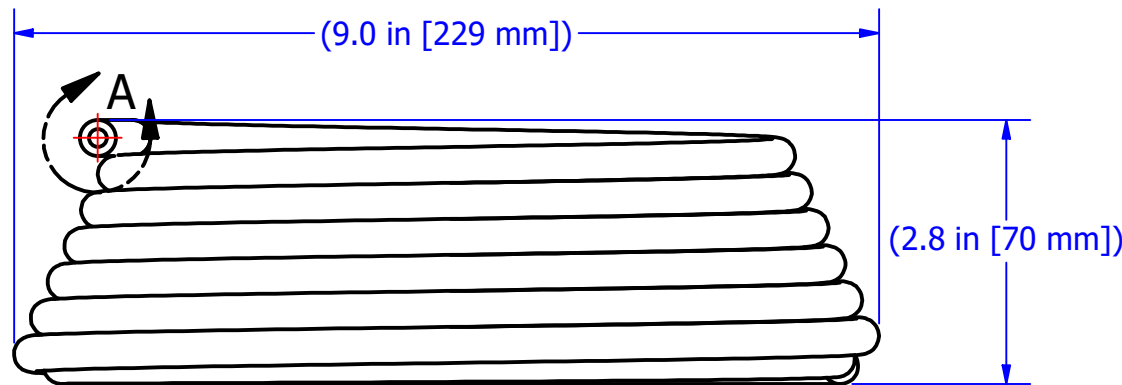


.375 in [9.5 mm] OD

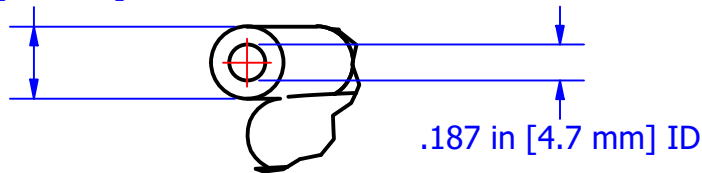

.187 in [4.7 mm] ID

DETAIL A
SCALE 1 : 1

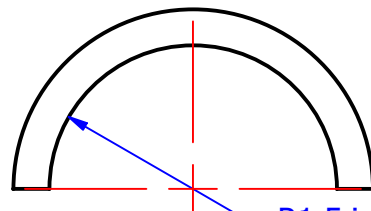

R1.5 in [R38 mm]
MAX BEND RADIUS

TUBING INFORMATION

PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	48 - 54	POINTS
TENSILE STRENGTH	1100 MIN	PSI
ELONGATION	550 MIN	%
TEAR B	150 MIN	PPI
BURST PRESSURE	51.1 (3.52)	PSI (BAR)
OPERATING TEMPERATURE	500 (260) MAX	°F (°C)

NOTES:

- 1.0 MATERIAL: PLATINUM CURED SILICONE
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, ETO, AND AUTOCLAVE.
- 4.0 STANDARD COIL IS 50 FT

DRAWN EA Flores	8/12/2022
CHECKED YA Zanki	8/12/2022
APPROVED CD Morland	8/12/2022

International Filter Products

7914 AJAY DR.
SUN VALLEY, CA 91352

PHONE: 818-504-8115
FAX: 818-841-2947
email: charlie@internationalfilterproducts.com

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

DECIMALS	FRACTIONS +/- 1/16
X +/- .030	ANGLES +/- 1/2
XX +/- .015	SURFACE ROUGHNESS 125
XXX +/- .005	

CONCENTRICITIES .010 (FIM)
INTERNAL RADII .015~.030
BREAK CORNERS .005~.015

TITLE Tube, 0.187" X 0.375", Silicone			
SIZE A	ISOF NO	DWG NO ULTRA-C-187-3F	REV -
SCALE NA	WEIGHT 2.200 lbmass (approx.)	SHEET 1	OF 1