

4

3

2



1

THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS


ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	8/12/2022	CD Morland

D

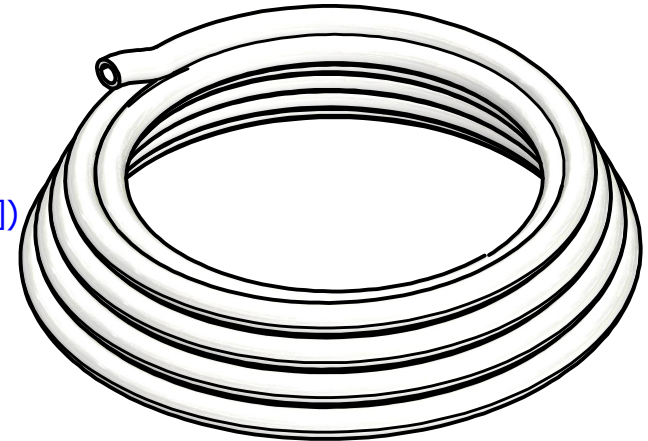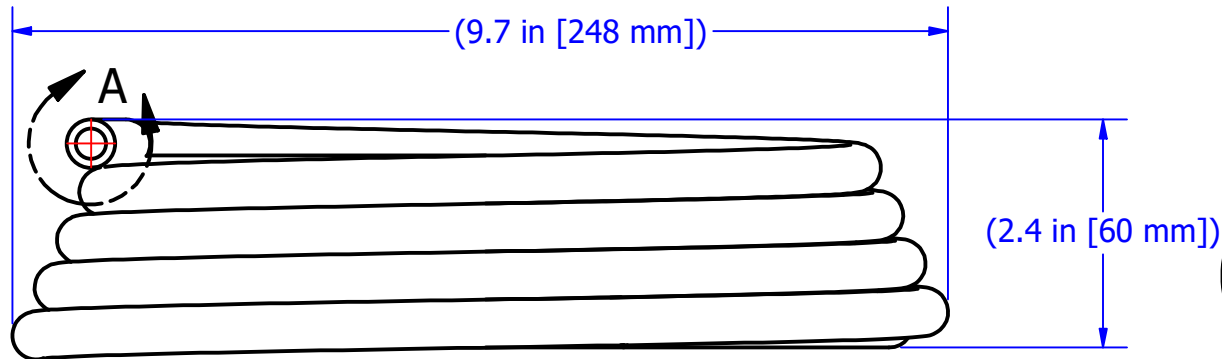

C


C

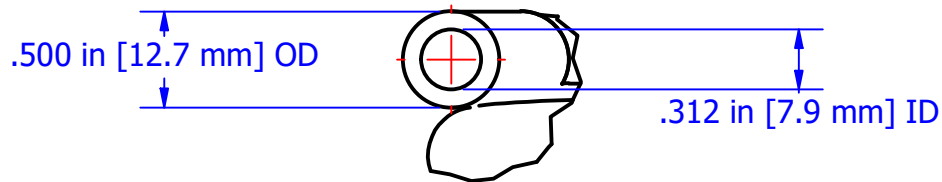

DETAIL A
SCALE 1 : 1

B

B

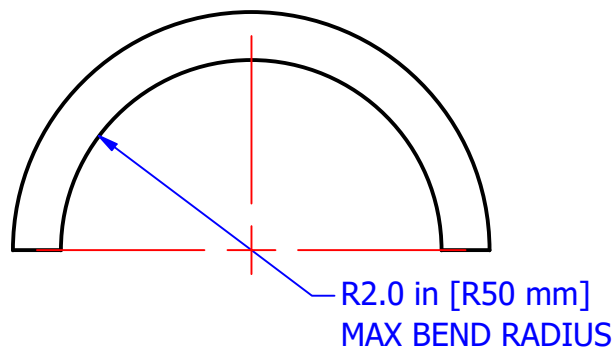

R2.0 in [R50 mm]
MAX BEND RADIUS

TUBING INFORMATION

PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	48 - 54	POINTS
TENSILE STRENGTH	1100 MIN	PSI
ELONGATION	550 MIN	%
TEAR B	150 MIN	PPI
BURST PRESSURE	36.0 (2.48)	PSI (BAR)
OPERATING TEMPERATURE	500 (260) MAX	°F (°C)

NOTES:

A

- 1.0 MATERIAL: PLATINUM CURED SILICONE
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, ETO, AND AUTOCLAVE.
- 4.0 STANDARD COIL IS 50 FT

DRAWN EA Flores	8/12/2022
CHECKED YA Zanki	8/12/2022
APPROVED CD Morland	8/12/2022

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

DECIMALS	FRACTIONS +/- 1/16
X +/- .030	ANGLES +/- 1/2
XX +/- .015	SURFACE ROUGHNESS 125
XXX +/- .005	
CONCENTRICITIES .010 (FIM)	
INTERNAL RADII .015~.030	
BREAK CORNERS .005~.015	

International Filter Products

7914 AJAY DRIVE
SUN VALLEY, CA 91352

PHONE: 818-504-8115
FAX: 818-841-2947
email: charlie@internationalfilterproducts.com

TITLE

Tube, 0.312" X 0.500", Silicone

SIZE	ISOF NO	DWG NO	REV
A		ULTRA-C-312-3F	-
SCALE	NA	WEIGHT 2.800 lbmass (approx.)	SHEET 1 OF 1

4

3

2

1