

4

3

2

1


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS


ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	8/11/2022	CD Morland

D


D

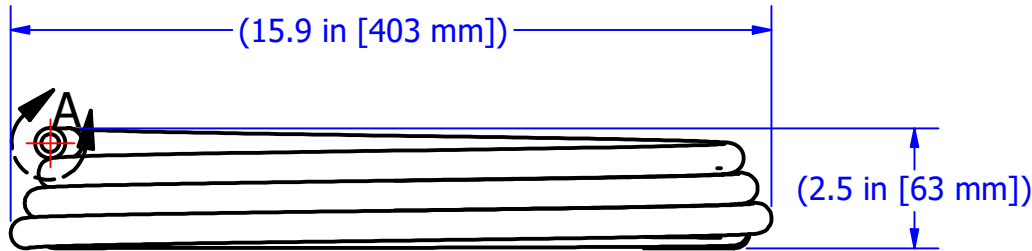


.625 in [15.9 mm] OD

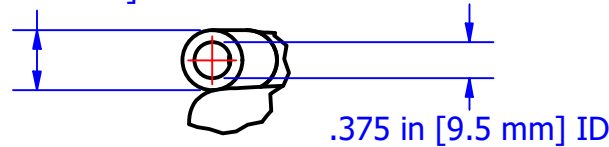

DETAIL A
SCALE 0.50 : 1

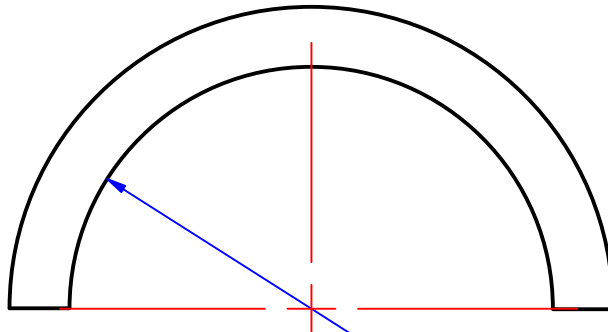

R2.5 in [R64 mm]
MAX BEND RADIUS

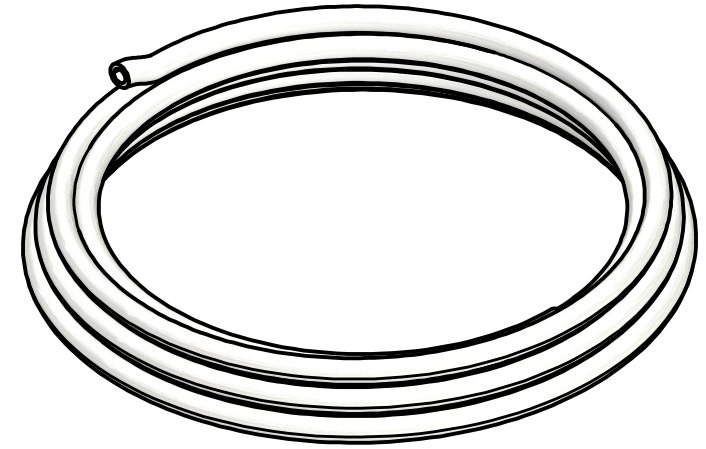

C

C

TUBING INFORMATION

PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	48 - 54	POINTS
TENSILE STRENGTH	1100 MIN	PSI
ELONGATION	550 MIN	%
TEAR B	150 MIN	PPI
BURST PRESSURE	42.1 (2.90)	PSI (BAR)
OPERATING TEMPERATURE	500 (260) MAX	°F (°C)

B

B

NOTES:

- 1.0 MATERIAL: PLATINUM CURED SILICONE
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, ETO, AND AUTOCLAVE.
- 4.0 STANDARD COIL IS 25 FT

DRAWN EA Flores	8/11/2022	International Filter Products			
CHECKED YA Zanki	8/11/2022	7914 AJAY DRIVE SUN VALLEY, CA 91352		PHONE: 818-504-8115 FAX: 818-841-2947 email: charlie@internationalfilterproducts.com	
APPROVED CD Morland	8/11/2022	TITLE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		Tube, 0.375" X 0.625", Silicone			
DECIMALS X +/- .030 XX +/- .015 XXX +/- .005	FRACTIONS +/- 1/16 ANGLES +/- 1/2 SURFACE ROUGHNESS 125				
CONCENTRICITIES .010 (FIM) INTERNAL RADII .015~.030 BREAK CORNERS .005~.015		SIZE A	ISOF NO	DWG NO ULTRA-C-375-4	REV -
SCALE		NA	WEIGHT 2.600 lbmass (approx.)	SHEET 1	OF 1

A

4

3

2

1