

4

3


2

1


THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	8/11/2022	CD Morland

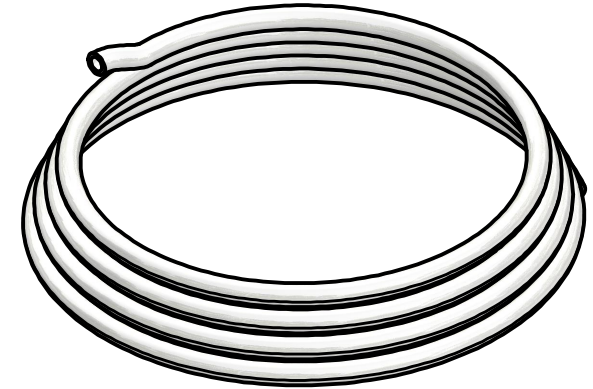

.750 in [19.1 mm] OD

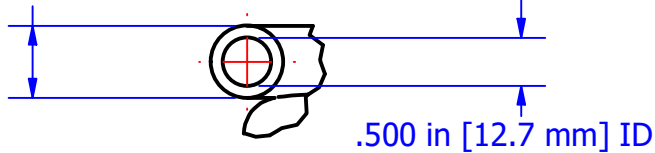


.500 in [12.7 mm] ID

DETAIL A
SCALE 1 / 2

TUBING INFORMATION

PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	48 - 54	POINTS
TENSILE STRENGTH	1100 MIN	PSI
ELONGATION	550 MIN	%
TEAR B	150 MIN	PPI
BURST PRESSURE	31.3 (2.16)	PSI (BAR)
OPERATING TEMPERATURE	500 (260) MAX	°F (°C)

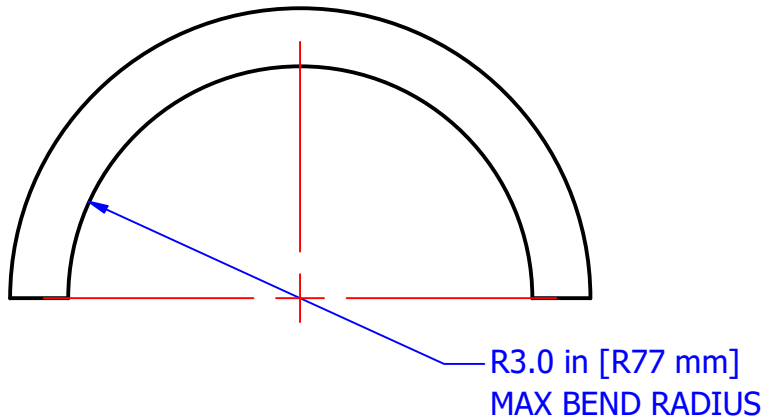

R3.0 in [R77 mm]
MAX BEND RADIUS

NOTES:

- 1.0 MATERIAL: PLATINUM CURED SILICONE
- 2.0 CLEAN ROOM DOUBLE BAGGED.
- 3.0 STERILIZABLE BY GAMMA IRRADIATION, ETO, AND AUTOCLAVE.
- 4.0 STANDARD COIL IS 25 FT

DRAWN EA Flores	8/11/2022
CHECKED YA Zanki	8/11/2022
APPROVED CD Morland	8/11/2022

International Filter Products

7914 AJAY DRIVE
SUN VALLEY, CA 91352

PHONE: 818-504-8115
FAX: 818-841-2947
email: charlie@internationalfilterproducts.com

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	
DECIMALS	FRACTIONS +/- 1/16
X +/- .030	ANGLES +/- 1/2
XX +/- .015	SURFACE ROUGHNESS 125
XXX +/- .005	
CONCENTRICITIES .010 (FIM)	
INTERNAL RADII .015~.030	
BREAK CORNERS .005~.015	

TITLE Tube, 0.500" X 0.750", Silicone			
SIZE A	ISOF NO	DWG NO ULTRA-C-500-4	REV -
SCALE NA	WEIGHT 3.200 lbmass (approx.)	SHEET 1 OF 1	