

4

3

2

1



THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS. UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	Sales Drawing	9/30/2022	CD Morland

D


D

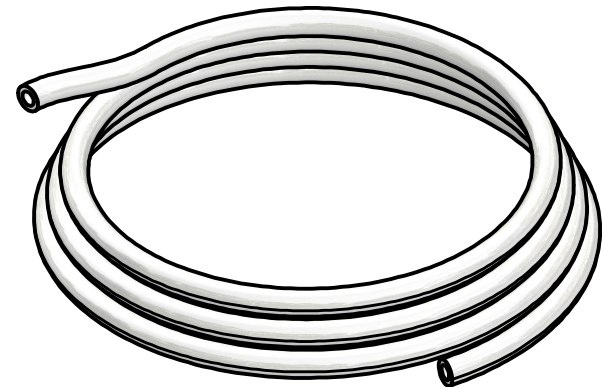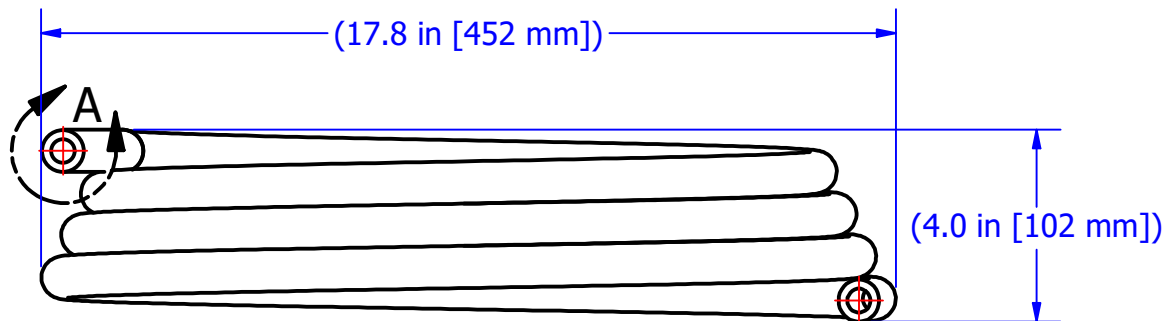

C


C

.880 in [22.4 mm] OD

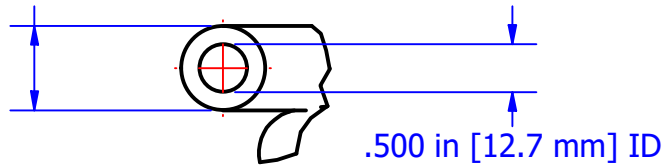

.500 in [12.7 mm] ID

DETAIL A
SCALE 1 / 2

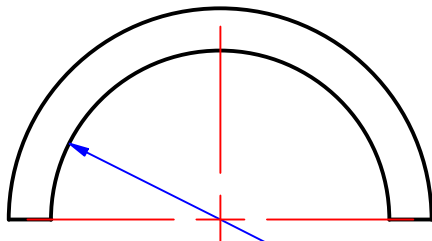

R3.5 in [R89 mm]
MAX BEND RADIUS

TUBING INFORMATION

PROPERTY	SPECIFICATION	UNIT
DUROMETER (SHORE A)	48-54	POINTS
TENSILE STRENGTH	1100 MIN	PSI
ELONGATION	550 MIN	%
TEAR B	150 MIN	PPI
BURST PRESSURE	42.4 (2.92)	PSI (BAR)
OPERATING TEMPERATURE	500 (260) MAX	°F (°C)

NOTES:

- 1.0 MATERIAL: PLATINUM CURED SILICONE
 2.0 CLEAN ROOM DOUBLE BAGGED.
 3.0 STERILIZABLE BY GAMMA IRRADIATION, ETO, AND AUTOCLAVE.
 4.0 STANDARD COIL IS 25 FT

DRAWN EA Flores	9/30/2022
CHECKED YA Zanki	9/30/2022
APPROVED CD Morland	9/30/2022

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

DECIMALS X +/- .030 XX +/- .015 XXX +/- .005	FRACTIONS +/- 1/16 ANGLES +/- 1/2 SURFACE ROUGHNESS 125
CONCENTRICITIES .010 (FIM) INTERNAL RADII .015~.030 BREAK CORNERS .005~.015	

International Filter Products

7914 AJAY DRIVE
SUN VALLEY, CA 91352

PHONE: 818-504-8115
FAX: 818-841-2947
email: charlie@internationalfilterproducts.com

TITLE

Tube, 0.500" X 0.880", Silicone

SIZE	ISOF NO	DWG NO	REV
A		ULTRA-C-500-5	-
SCALE	NA	WEIGHT 3.800 lbmass (approx.)	SHEET 1 OF 1

4

3

2

1

A

A